

CHECK POINT TOTAL SECURITY APPLIANCES



Flexible Deployment. Centralized Management.

Check Point appliances deliver a powerful turnkey solution for deploying Check Point award-winning software solutions to address virtually any security need. Based on the new Check Point Software Blade architecture, Check Point appliances provide a level of flexibility, scalability, and extensibility unique in the industry. All Check Point appliances are built around a unified security architecture, enabling organizations to perform all aspects of security management via a single, unified console. With Check Point appliances, organizations of all sizes can tailor their network security infrastructure to meet their functional and performance needs with centralized management, simple deployment, and full extensibility.



Check Point[®]
SOFTWARE TECHNOLOGIES LTD.

UTM-1 Appliances



All inclusive. All secured.


UTM-1™ appliances offer the ideal combination of proven security technologies and easy-to-use deployment and management features. With a full line of hardware-based solutions, Check Point UTM-1 appliances consolidate key security applications such as firewall, VPN, intrusion prevention, and antivirus and more into a single, easy-to-manage solution. UTM-1 Appliances are based on the Check Point Software Blade architecture that enables flexible and fast deployment of additional security capabilities, such as VoIP protections, without the addition of new hardware.

UTM-1 appliances deliver a comprehensive set of security features including firewall, intrusion prevention, antivirus, anti-spyware, anti-spam, Web filtering, Web application security—as well as secure site-to-site and remote access connectivity. **UTM-1 Edge™** appliances deliver integrated firewall, intrusion prevention, VPN, and antivirus for branch offices of up to 100 users, ensuring small offices stay as secure as the corporate office.

BENEFITS

- Industry-leading application- and network-layer firewall
- Site-to-site and remote-access VPNs
- Gateway antivirus and anti-spyware
- Intrusion prevention with type-based protections and security updates
- Web security with URL filtering and integrated security for Web applications
- Email security and anti-spam, including the Check Point six dimensions of comprehensive messaging security
- Software Blade architecture for fast and flexible deployment of new security services

UTM-1 appliances come in six models and **UTM-1 Edge** appliances come in four models that let organizations choose the right solution to meet price and performance requirements.

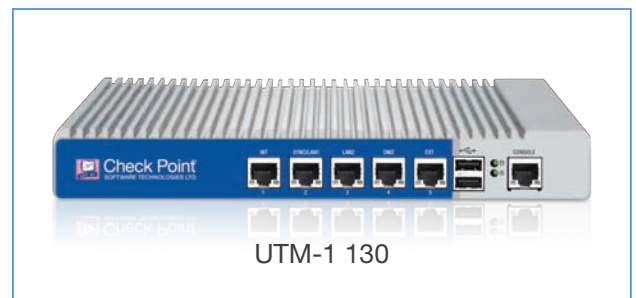

Power-1 Appliances

Security for high-performance environments

Check Point Power-1™ appliances enable organizations to maximize security in high-performance environments such as large campuses or data centers. They combine integrated firewall, IPsec VPN, and intrusion prevention with advanced acceleration and networking technologies, delivering a high-performance security platform for multi-Gbps environments. The Check Point Software Blade architecture enables flexible and fast deployment of additional security capabilities, such as VoIP protections and UTM functionality, on Power-1 appliances.

BENEFITS

- Streamlines deployment of enterprise security for large offices and data centers
- Ensures availability of business-critical applications with up to 25 Gbps firewall throughput and up to 15 Gbps intrusion prevention throughput
- Provides comprehensive security including Firewall, IPS, IPsec VPN, Advanced Networking, and Acceleration & Clustering Software Blades
- Protects against emerging threats with optional Software Blades such as VoIP, Web Security, Antivirus, and more
- Simplifies administration with a single management console for all sites
- Power-1 11000 series adds performance extensibility via field upgradeability and enables customers to boost performance by 66% from lowest to highest model

Power-1 appliances, which include **Power-1 5075**, **Power-1 9075**, and the **Power-1 11000** series, let organizations choose the proper levels of performance and port density for their environments.



IP Appliances




Flexible networking and performance options

Proven for years in complex networking and performance-demanding environments, Check Point IP appliances offer customers integrated turnkey security functionality such as firewall, VPN, and intrusion prevention across a wide range of models. Optimized for Check Point Security Gateway software, the IP appliances offer unsurpassed scalability, high performance, manageability, and high port densities that reduces operational costs in complex, mission-critical security environments. IP appliances enable customers to extend a unified security architecture from the network core out to branch and remote offices.

BENEFITS

- Integrated security appliances based on Check Point Software Blade architecture for fast, flexible deployment of security functionality
- Scalable, modular, and configurable security architecture with multiple acceleration (ADP service modules), security, and interface options insures investment protection
- Achieve high performance across a broad spectrum of traffic types
- Enterprise-class high availability, scalability, and fault tolerance to insure network resiliency and business continuity
- Carrier-grade serviceability and redundancy
- Streamlined IT efficiency with advanced management tools for installation, configuration, and maintenance

IP appliances come in six models that deliver security solutions ideal for large enterprises and carrier-grade networks.

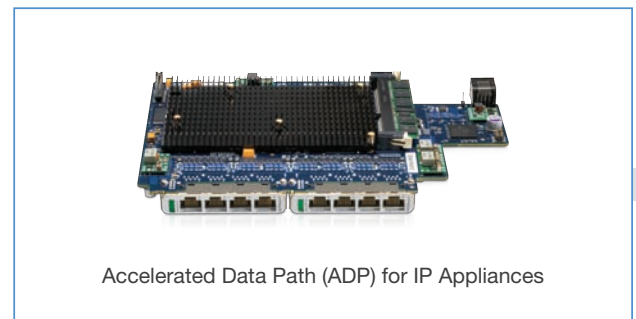

VSX-1 Appliances

Virtualized security

The **VSX-1™** appliances are virtualized security gateways that enable the creation of hundreds of security systems on a single hardware platform, delivering deep cost savings and infrastructure consolidation. Based on the proven security of VPN-1® Power™, VSX provides best-in-class firewall, VPN, URL filtering, and intrusion-prevention technology to multiple networks, securely connecting them to each other and shared resources such as the Internet and DMZs. All security systems, virtual and real, are centrally managed through Check Point SmartCenter™ or Provider-1® management consoles.

Ideal for MSPs, VSX-1 becomes the ideal platform for new subscription revenue opportunities by delivering new security services easily and efficiently.

BENEFITS

- Unique and comprehensive virtualized security solution with firewall, VPN, IPS, and URL filtering
- Consolidates from five to hundreds of security gateways on a single device, increasing device utilization and reducing power, space, and cooling
- Linear scalability with performance up to 27 Gbps
- Flexible deployment options including software and a full line of turnkey appliances
- Single proven security management architecture

VSX-1 appliances come in three models that allow organizations to choose the right solution for their performance and scalability needs.



Smart-1 Appliances



Extensible Security Management

Smart-1 appliances deliver Check Point's market leading security management software blades on a dedicated hardware platform specifically designed for mid-size and large enterprise security networks. Based on Check Point's software blade architecture, the line of four Smart-1 appliances are first to deliver a unified management solution for network, IPS and endpoint security with unsurpassed extensibility.

BENEFITS

- Provides a comprehensive set of security management Software Blades in four turnkey security management appliances
- Maximize efficiency with a single unified management console for network and endpoint security
- Reduce costs and conserve resources with up to 12 TB of integrated storage capabilities
- Ensure operational continuity for the most demanding environments
- Simplify large scale security policy provisioning with multi-domain management (Provider-1)

Smart-1 150: Security management for large service providers with more than 150 gateways and including up to 12 TB of integrated log storage

Smart-1 50: Security management for enterprises and service providers with 50 to 150 gateways, including up to 4 TB of integrated log storage

Smart-1 25: Security management for enterprises with 25 to 50 gateways, including up to 2 TB of integrated log storage

Smart-1 5: Security management for businesses with 5 to 25 gateways including up to 500 GB of integrated log storage



Check Point Integrated Appliance Solutions



Integrated software and hardware from Check Point and IBM

Check Point Integrated Appliance Solutions (IAS) provide organizations with the ultimate choice in appliances—integrated software and hardware bundles customized to their exact specifications. These customized platforms enable them to provision security services based on exact corporate needs.

Organizations can choose from Check Point Software Blades such as firewall, IPSec VPN, and intrusion prevention, and additional blades including UTM functionality. They can also choose to deploy Check Point's virtualized security gateway, VPN-1 Power VSX™, as well as Provider-1 for management of large deployments with separate security domains.

Check Point integrates the selected software onto an IBM System x™ server or IBM BladeCenter® to provide a comprehensive solution that includes direct technical support from Check Point.

BENEFITS

- Provides a software/hardware combination trusted by the largest organizations in the world
- Reduces complexity by ensuring compatibility of the latest certified components and servers
- Increases flexibility for security services provisioning by allowing customers to choose from multiple Check Point solutions
- Delivers scalable performance and port density based on customer needs
- Protects against emerging threats with service-based Check Point Software Blades including IPS, Antivirus, Anti-Malware, and URL Filtering

M series Integrated Appliance Solutions are predefined models that can be customized to meet specific needs. The **M2** model delivers UTM functionality. The **M6** and **M8** models both provide maximum security for high-performance environments with integrated firewall, VPN, and intrusion prevention.



For more information: www.checkpoint.com/products/ias.

Appliance Specifications



Check Point
SOFTWARE TECHNOLOGIES LTD.

	UTM-1 Edge	UTM-1 130	UTM-1 270	UTM-1 570	UTM-1 1070	UTM-1 2070	UTM-1 3070
Models	UTM-1 Edge X, UTM-1 Edge W, UTM-1 Edge X ADSL, UTM-1 Edge W ADSL	UTM-1 132 UTM-1 136	UTM-1 272 UTM-1 276	UTM-1 572 UTM-1 576	UTM-1 1073 UTM-1 1076	UTM-1 2073 UTM-1 2076	UTM-1 3073 UTM-1 3076
Software Edition	Embedded NGX	R65, R70	R65, R70	R65, R70	R65, R70	R65, R70	R65, R70
10/100 Ports	6	1	-	-	-	-	-
10/100/1000 Ports	-	4	4	6	6	8	10
Firewall Throughput	190 Mbps	400 Mbps	600 Mbps	1.1 Gbps	2 Gbps	3 Gbps	4.5 Gbps
VPN Throughput	35 Mbps	100 Mbps	100 Mbps	250 Mbps	250 Mbps	280 Mbps	1.1 Gbps
Concurrent Sessions	8,000	300,000	600,000	800,000	1.1 million	1.1 million	1.1 million
IPS Throughput	-	300 Mbps ¹	380 Mbps ¹	700 Mbps ¹	900 Mbps ¹	1 Gbps ¹	4 Gbps ¹
Licensed Users	8/16/32/U	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
VLANs	32	1024 ²	1024 ²	1024 ²	1024 ²	1024 ²	1024 ²
UTM Out of the Box	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Security Acceleration	No	No	No	No	No	No	Yes
Multisite Management	No	Standalone	Yes	Yes	Yes	Yes	Yes
Storage	-	80 GB	160 GB	160 GB	160 GB	160 GB	160 GB
Enclosure	Desktop	Desktop	1U	1U	1U	1U	1U
Dimensions (standard)	1.2 x 8 x 4.8 in.	10.6 x 5.7 x 1.6 in.	16.8 x 10 x 1.73 in.	16.8 x 10 x 1.73 in.	16.8 x 10 x 1.73 in.	17.4 x 15 x 1.73 in.	17.4 x 15 x 1.73 in.
Dimensions (metric)	30 x 203 x 122mm	270 x 145 x 40mm	429 x 255 x 44mm	429 x 255 x 44mm	429 x 255 x 44mm	443 x 381 x 44mm	443 x 381 x 44mm
Weight	0.7kg (1.6lbs)	1.6kg (3.52lbs)	3.7kg (8.1lbs)	3.7kg (8.1lbs)	3.7kg (8.1lbs)	6.5kg (14.3lbs)	6.5kg (14.3lbs)
Operating Environment	Temperature: 5° to 40° C, Humidity: 10%-85% non-condensing, Altitude: 2,500m ³						
Power Input	100/240V, 50/60Hz						
Power Supply Spec (Max)	18W	60W	65W	65W	65W	250W	250W
Power Consumption (Max)		46.9W	26.2W	41.1W	40.1W	63.1W	77.5W

¹ Test based on real-world traffic blend using the default profile

² Maximum of 256 VLANs per interface

³ UTM-1 Edge operating environment: Temperature: 0° to 40° C, Humidity: 10%–90% non-condensing, Altitude: 4500m (15,000ft)

Appliance Specifications

	Power-1 5075	Power-1 9075	Power-1 11000 Series		
			11065	11075	11085
Software Edition	R65, R70	R65, R70	R70	R70	R70
10/100/1000 Ports	10/14	14/18	14/18	14/18	14/18
Firewall Throughput ²	9 Gbps	16 Gbps	15 Gbps	20 Gbps	25 Gbps
VPN Throughput ²	2.4 Gbps	3.7 Gbps	3.7 Gbps	4 Gbps	4.5 Gbps
Concurrent Sessions	1.2 million	1.2 million	1.2 million	1.2 million	1.2 million
IPS Throughput ²	7.5 Gbps ³	10 Gbps ³	10 Gbps ³	12 Gbps ³	15 Gbps ³
Licensed Users	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
VLANs	1024 ⁴	1024 ⁴	1024 ⁴	1024 ⁴	1024 ⁴
UTM Out of the Box	Optional	Optional	Optional	Optional	Optional
Security Acceleration	Yes	Yes	Yes	Yes	Yes
Integrated Multigateway Management	-	-	-	-	-
Storage	160 GB	2 x 160 GB	2 x 250 GB	2 x 250 GB	2 x 250 GB
Enclosure	2U	2U	2U	2U	2U
Dimensions (standard)	17 x 20 x 3.46 in.	17 x 20 x 3.46 in.	17 x 22.8 x 3.46 in.	17 x 22.8 x 3.46 in.	17 x 22.8 x 3.46 in.
Dimensions (metric)	431 x 509.5 x 88mm	431 x 509.5 x 88mm	431 x 580 x 88mm	431 x 580 x 88mm	431 x 580 x 88mm
Weight	14.5kg (31.9 lbs)	16.5kg (36.3 lbs)	23.4kg (51.6 lbs)	23.4kg (51.6 lbs)	23.4kg (51.6 lbs)
Operating Environment	Temperature: 5° to 40° C, Humidity: 10%–85% non-condensing, Altitude: 2,500m				
Power Input	100–240V, 50–60Hz ⁵				
Power Supply Spec (Max)	250W	400W	500W	500W	500W
Power Consumption (Max)	164.1W	200.7W	253.2W	253.2W	253.2W

¹ Performance data represents the maximum capabilities of the systems as measured under optimal testing conditions. Deployment and policy considerations may impact performance results.

² Test based on real-world traffic blend using the default profile

³ Maximum of 256 VLANs per interface

⁴ Redundant power supply

Appliance Specifications



	IAS ¹ M2	IAS ¹ M6	IAS ¹ M8
Software Edition	R65, R70	R65, R70	R65, R70
10/100/1000 Ports	4/10	10/10	14/18
Firewall Throughput ²	7 Gbps	16 Gbps	20 Gbps
VPN Throughput ²	2.4 Gbps	3 Gbps	4 Gbps
Concurrent Sessions	1.2 million	1.2 million	1.2 million
IPS Throughput ²	4 Gbps ³	7.1 Gbps ³	8.6 Gbps ³
Licensed Users	Unlimited	Unlimited	Unlimited
VLANs	256	256	256
UTM Out of the Box	Yes	Optional	Optional
Security Acceleration	Optional	Yes	Yes
Integrated Multigateway Management	Optional	Optional	Optional
Storage	2 x 73 GB	2 x 73 GB	2 x 73 GB
Enclosure	1U	1U	2U
Dimensions (standard)	17.3 x 27.5 x 1.75 in.	17.3 x 27.5 x 1.75 in.	17.5 x 27.5 x 3.36 in.
Dimensions (metric)	440 x 698 x 44mm	443 x 698 x 44mm	444 x 698 x 84.8mm
Weight	16.1kg (35.5 lbs)	16.1kg (35.5 lbs)	26.1kg (57.5 lbs)
Operating Environment	Temperature: 5° to 40° C, Humidity: 10%–85% non-condensing, Altitude: 2,500m		
Power Input	100~240V, 50~60Hz ⁴		
Power Supply Spec (Max)	650W	650W	1300W
Power Consumption (Max)	180W	212W	342W

¹ IAS = Integrated Appliance Solutions

² Performance data represents the maximum capabilities of the systems as measured under optimal testing conditions. Deployment and policy considerations may impact performance results.

³ Test based on real-world traffic blend using the default profile

⁴ Redundant power supply

Appliance Specifications

1.2699 IN	IP295	IP395	IP565	IP695	IP1285	IP2455
Software Edition	R65, R70	R65, R70	R65, R70	R65, R70	R65, R70	R65, R70
10/100/1000 Ports	6/8	4/8	4/12	4/16	4/28	4/32
10 GbE Ports	-	-	-	6 ¹	10 ¹	10 ¹
Firewall Throughput	1.5 Gbps	3.0 Gbps	7 Gbps	7.2/11.7 Gbps ²	10.3/17.5 Gbps ²	11/30 Gbps ²
VPN Throughput	1.0 Gbps	677 Mbps	1.7 Gbps	1.9/ 3.3 Gbps ²	1.9/8.3 Gbps ²	1.9/8.3 Gbps ²
Concurrent Sessions	900,000	1 million	1 million	1 million	1 million	1 million
IPS Throughput	1.4 Gbps ³	2.9 Gbps ³	2.9 Gbps ³	4 Gbps ³	7 Gbps ³	9 Gbps ³
VLANs	1024 ⁵	1024 ⁵	1024 ⁴	1024 ⁴	1024 ⁴	1024 ⁴
ADP Module	-	-	-	Optional	Optional	Optional
VPN Acceleration	Optional	Included	Included	Included	Included	Included
Storage	40 GB	80 GB	80 GB	80 GB	80 GB	80 GB
Disk-Based or Flash	Disk or Flash	Disk or Flash	Disk or Flash	Disk or Flash	Disk or Flash	Disk or Flash
Enclosure	1U/half rack	1U	1U	1U	2U	2U
Dimensions (standard)	8.52 x 18 x 1.71 in.	17 x 16 x 1.71 in.	17.23 x 22 x 1.71 in.	17.23 x 24 x 1.71 in.	17.23 x 24.11 x 3.46 in.	17.23 x 24.11 x 3.46 in.
Dimensions (metric)	216 x 457 x 44mm	432 x 406 x 44mm	438 x 559 x 44mm	438 x 610 x 44mm	438 x 613 x 88mm	438 x 613 x 88mm
Weight	5.1kg (11.25 lbs)	7.71kg (17.0 lbs)	11.84kg (26.1 lbs)	12.38kg (27.3 lbs)	19.6kg (43.2 lbs)	20.57kg (45.35 lbs)
Operating Environment	Temperature: 5° to 40° C ⁵ , Humidity: 10%–85% non-condensing, Altitude: 2,500m					
Power Input	100/240V, 50/60Hz					
Power Supply Spec (Max)	133W	150W	225W	250W	700W	700W
Power Consumption (Max)		100W	165W			
DC Power Supply	-	-	-	-	Optional	Optional
Compliance	Safety: UL60950-1, First Edition: 2003, CAN/CSAC22.2, No 60950:2000, IEC60950-1: 2001, EN60950-1:2001+A11 with Japanese National Deviations; Emission Compliance: FCC Part 15, Subpart B, Class A, EN50024,EN55022A: 1998, CISPR 22 Class A: 1985, EN61000-3-2, EN61000-3-3; Immunity: EN55024: 1998					

¹ Optional

² Performance without ADP/with ADP

³ Preliminary results

⁴ Maximum of 256 VLANs per interface

⁵ IP395 can go to 50° C

Appliance Specifications



Check Point
SOFTWARE TECHNOLOGIES LTD.

	VSX-1 3070	VSX-1 9070	VSX-1 9090
Software Edition	VSX NGX R65	VSX NGX R65	VSX NGX R65
10/100/1000 Ports	10	14/18	28/36
Firewall Throughput	4.5 Gbps	13.5 Gbps	27 Gbps
VPN Throughput	1.1 Gbps	3.5 Gbps	7 Gbps
Concurrent Sessions	1 million	1.1 million	1.8 million
Licensed Users	Unlimited	Unlimited	Unlimited
VLANs	4096	4096	4096
Virtual Systems (included/capacity)	5/10	10/150	10/150
UTM Out of the Box	Optional	Optional	Optional
Security Acceleration	Yes	Yes	Yes
Multisite Management	Optional ¹	Optional ¹	Optional ¹
Storage	160 GB	2 x 160 GB	4 x 160 GB
Enclosure	1U	2U	4U
Dimensions (standard)	17.4 x 15 x 1.73 in.	17 x 20 x 3.46 in.	17 x 20 x 7 in.
Dimensions (metric)	443 x 381 x 44mm	431 x 509.5 x 88mm	431 x 509.5 x 176mm
Weight	6.5kg (14.3 lbs)	16.5kg (36.3 lbs)	33kg (72.6 lbs)
Operating Environment	Temperature: 5° to 40° C, Humidity: 10%-85% non-condensing, Altitude: 2,500m		
Power Input	100/240V, 50/60Hz		
Power Supply Spec (Max)	250W	400W	800W
Power Consumption (Max)	77.5W	200.7W	400.5W

¹ Management server resides on separate server

Appliance Specifications



	Smart-1 5	Smart-1 25	Smart-1 50	Smart-1 150
Software Edition	R65, R70	R65, R70	R65, R70	R65, R70
Managed Gateways	5 up to 25	25 up to 50	50 up to 150	150 up to unlimited
Multi-Domain Management (Provider-1)	-	-	1 up to 3/5/10	3 up to 5/10/50
Management HA	Included	Included	Included	Included
Logs/sec	7,500	14,000	30,000	30,000
Built-in Interfaces	5 Copper GbE	5 Copper GbE	4 Copper GbE	4 Copper GbE
LCD Display	Yes	-	Yes	Yes
Storage	1 x 0.5 TB	4 x 0.5 TB	4 x 1 TB	4 x 1 TB, up to 12 TB
Storage Type	-	RAID 10	RAID 10	RAID 10
Fibre Channel SAN card	-	-	Optional	Optional
Out of Band Management	-	Integrated	Integrated	Integrated
Enclosure	1U	1U	2U	3U
Dimensions (standard)	17 x 10.9 x 1.75 in.	17 x 21.7 x 1.75 in.	22.8 x 17.4 x 3.5 in.	24.9 x 17.4 x 5.2 in.
Dimensions (metric)	431 x 277 x 44 mm	431 x 551 x 44 mm	580 x 442 x 88 mm	632 x 442 x 131 mm
Weight	6kg (13.2 lbs)	13kg (28.7 lbs)	23.5kg (51.8 lbs)	29.5kg (65 lbs)
Power supply	1	2	2	3
Power Input	100/240V, 50/60Hz	100/240V, 50/60Hz	90/264V, 47/63Hz	90/264V, 47/63Hz
DC Option	-	-	Yes	-
Power Supply Spec (Max)	150W	2 x 250W	2 x 600W	3 x 930W
Power Consumption (Max)	70.5W	135.8W	505.3W	399.6W
Operating environment range	Temperature: Ambient operating 0~40C, Humidity: 5~95% non-condensing (RH)			
Compliance	CE, FCC Class A, RoHS			

Contact Check Point now to discuss your Total Security appliances:

www.checkpoint.com/contactus

**By phone in the US: 1-800-429-4391 option 5 or
1-650-628-2000**



Check Point
SOFTWARE TECHNOLOGIES LTD.

CONTACT CHECK POINT

Worldwide Headquarters

5 Ha'Soleim Street, Tel Aviv 67897, Israel | Tel: 972-3-753-4555 | Fax: 972-3-624-1100 | Email: info@checkpoint.com

U.S. Headquarters

800 Bridge Parkway, Redwood City, CA 94065 | Tel: 800-429-4391; 650-628-2000 | Fax: 650-654-4233 | www.checkpoint.com

©2009 Check Point Software Technologies Ltd. All rights reserved. Check Point, AlertAdvisor, Application Intelligence, Check Point Endpoint Security, Check Point Endpoint Security On Demand, Check Point Express, Check Point Express CI, the Check Point logo, ClusterXL, Confidence Indexing, ConnectControl, Connectra, Connectra Accelerator Card, Cooperative Enforcement, Cooperative Security Alliance, CoreXL, CoSa, DefenseNet, Dynamic Shielding Architecture, Eventia, Eventia Analyzer, Eventia Reporter, Eventia Suite, FireWall-1, FireWall-1 GX, FireWall-1 SecureServer, FloodGate-1, Full Disk Encryption, HackerID, Hybrid Detection Engine, IMsecure, INSPECT, INSPECT XL, Integrity, Integrity Clientless Security, Integrity SecureClient, InterSpect, IPS-1, IQ Engine, MailSafe, NG, NGX, Open Security Extension, OPSEC, OSFirewall, Pointsec, Pointsec Mobile, Pointsec PC, Pointsec Protector, Policy Lifecycle Management, Power-1, Provider-1, PureAdvantage, PURE Security, the puresecurity logo, Safe@Home, Safe@Office, SecureClient, SecureClient Mobile, SecureKnowledge, SecurePlatform, SecurePlatform Pro, SecuRemote, SecureServer, SecureUpdate, SecureXL, SecureXL Turbocard, Security Management Portal, Sentivist, SiteManager-1, Smart-1, SmartCenter, SmartCenter Express, SmartCenter Power, SmartCenter Pro, SmartCenter UTM, SmartConsole, SmartDashboard, SmartDefense, SmartDefense Advisor, Smarter Security, SmartLSM, SmartMap, SmartPortal, SmartProvisioning, SmartUpdate, SmartView, SmartView Monitor, SmartView Reporter, SmartView Status, SmartView Tracker, SMP, SMP On-Demand, SofaWare, SSL Network Extender, Stateful Clustering, Total Security, the totalsecurity logo, TrueVector, Turbocard, UAM, UserAuthority, User-to-Address Mapping, UTM-1, UTM-1 Edge, UTM-1 Edge Industrial, UTM-1 Total Security, VPN-1, VPN-1 Accelerator Card, VPN-1 Edge, VPN-1 Express, VPN-1 Express CI, VPN-1 Power, VPN-1 Power Multi-core, VPN-1 Power VSX, VPN-1 Pro, VPN-1 SecureClient, VPN-1 SecuRemote, VPN-1 SecureServer, VPN-1 UTM, VPN-1 UTM Edge, VPN-1 VSX, VSX-1, Web Intelligence, ZoneAlarm, ZoneAlarm Anti-Spyware, ZoneAlarm Antivirus, ZoneAlarm ForceField, ZoneAlarm Internet Security Suite, ZoneAlarm Pro, ZoneAlarm Secure Wireless Router, Zone Labs, and the Zone Labs logo are trademarks or registered trademarks of Check Point Software Technologies Ltd. or its affiliates. ZoneAlarm is a Check Point Software Technologies, Inc. Company. All other product names mentioned herein are trademarks or registered trademarks of their respective owners. The products described in this document are protected by U.S. Patent No. 5,606,668, 5,835,726, 5,987,611, 6,496,935, 6,873,988, 6,850,943, and 7,165,076 and may be protected by other U.S. Patents, foreign patents, or pending applications.

November 10, 2009

totalsecurity™